


ν -Factory Front End Phase Rotation Simulations

David Neuffer
Fermilab
Muons, Inc.




Outline

- Neutrino Factory Front End Optimization
 - Improve neutrino factory scenario
 - For International Scoping study
- “High–frequency” Buncher and ϕ – δE Rotation
 - Study 2A scenario, Obtains $\sim 0.2 \mu/p$
 - Gas filled cavities
 - Higher gradients? In magnetic fields?
 - Cooling in buncher and rotator/shorter cheaper ?
System



Neutrino Factory – Study 2A



- Proton driver
 - Produces proton bunches
 - 8 GeV 10^{15} p/s
- Target and drift
 - $\pi \rightarrow \mu$ ($> 0.2 \mu/p$)
- Buncher, bunch rotation, cool
- Accelerate μ to 20 GeV
 - Linac, RLA and FFAGs
- Store at 20 GeV (0.4ms)
- $\mu \rightarrow e + \nu_{\mu} + \nu_{e}^{*}$
- Long baseline ν Detector
- $> 10^{20}$ ν /year

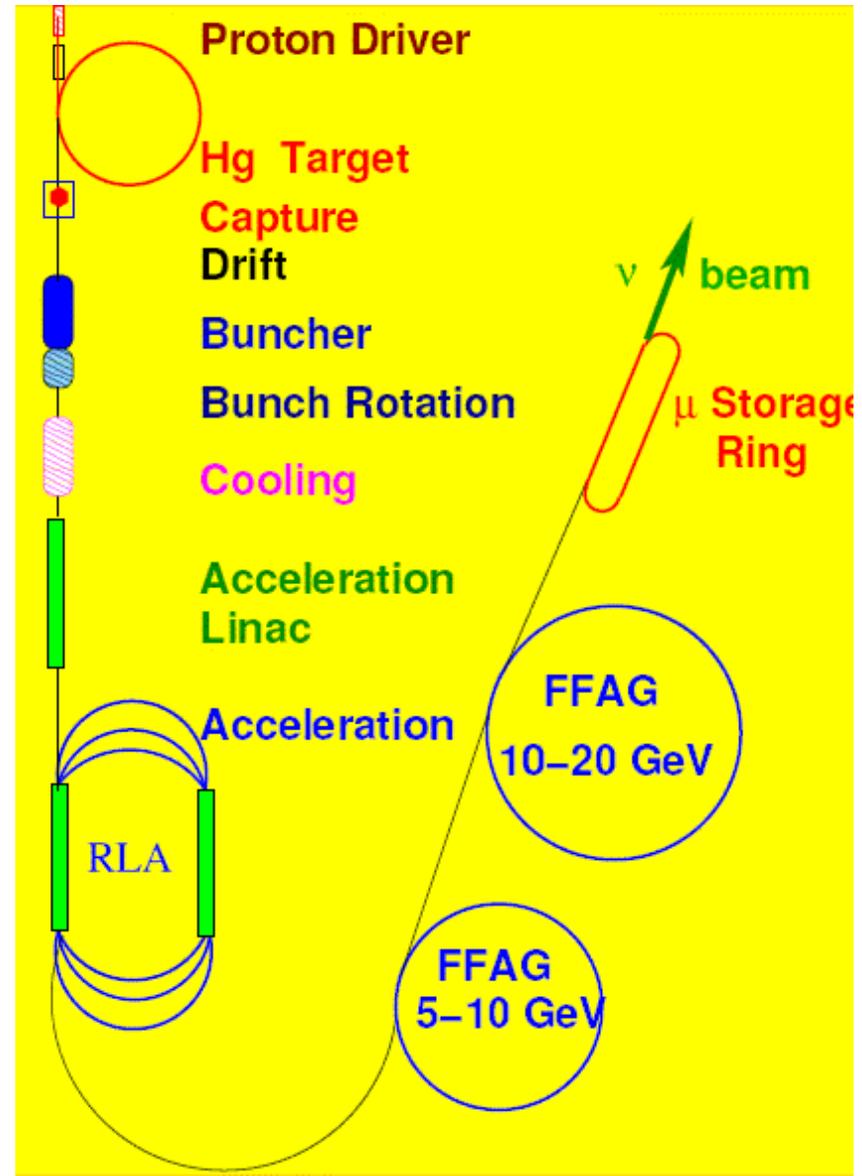




Study2AP June 2004 scenario



- **Target**– Hg-jet within 20T solenoid
- Drift –110.7m – within 1.75T solenoid
- **Bunch** –51m
 - $V\delta(1/\beta) = 0.0079$
 - 12 rf freq., **110MV**
 - 330 MHz → 230MHz
- **φ-E Rotate** – 54m – (**416MV total**)
 - 15 rf freq. 230→ 202 MHz
 - $P_1=280$, $P_2=154$ $\delta N_V = 18.032$
- **Match and cool** (80m)
 - 0.75 m cells, 0.02m LiH
- “Realistic” fields, components

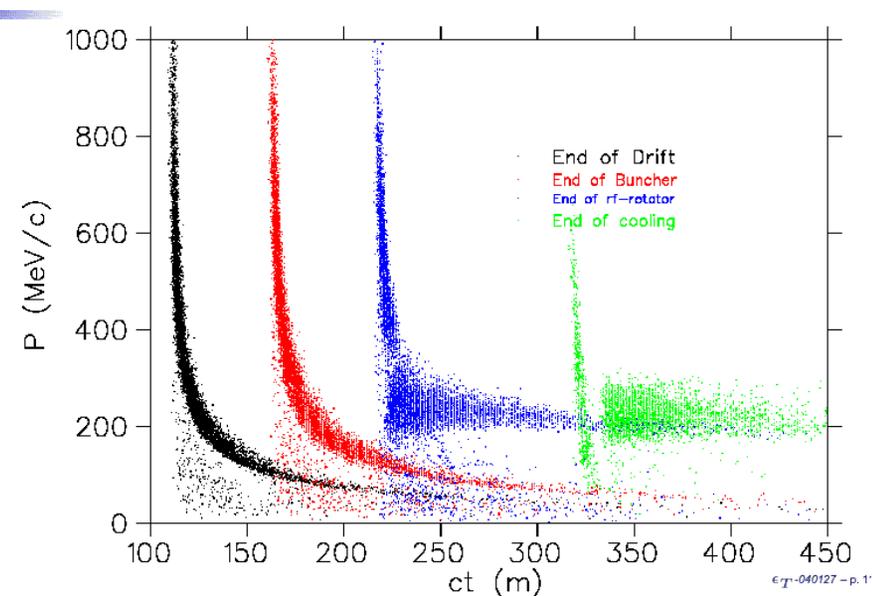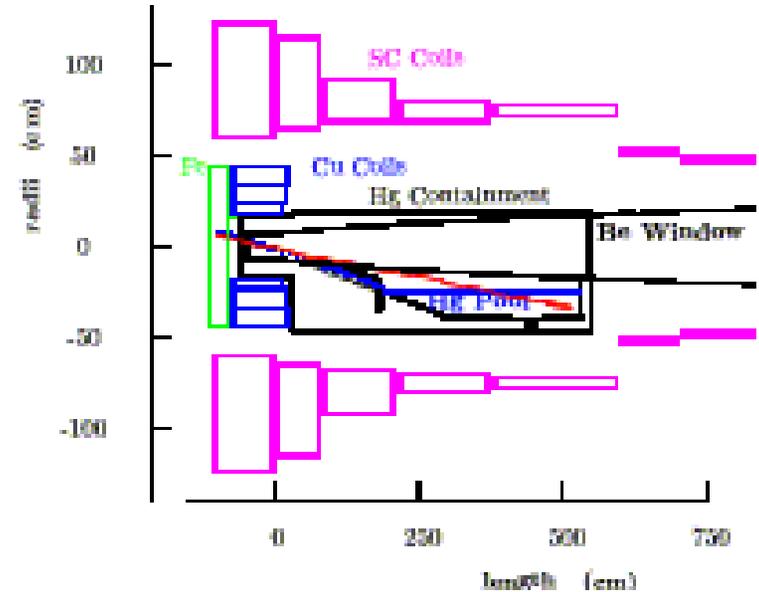



Simplest Modification from Study 2A



- Add gas + higher gradient to obtain **cooling within rotator**
- ~300MeV energy loss in cooling region
- Rotator is 54m;
 - Need ~4.5MeV/m H₂ Energy
 - 133atm, 295°K gas
 - ~250 MeV energy loss
- Alternating Solenoid lattice in rotator
- 20MV/m rf
- Lattice changes

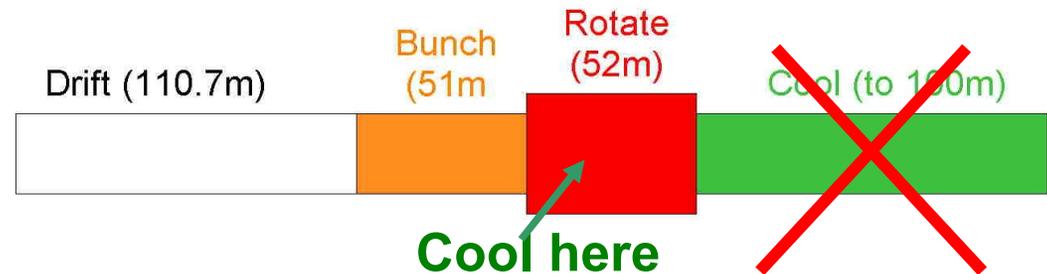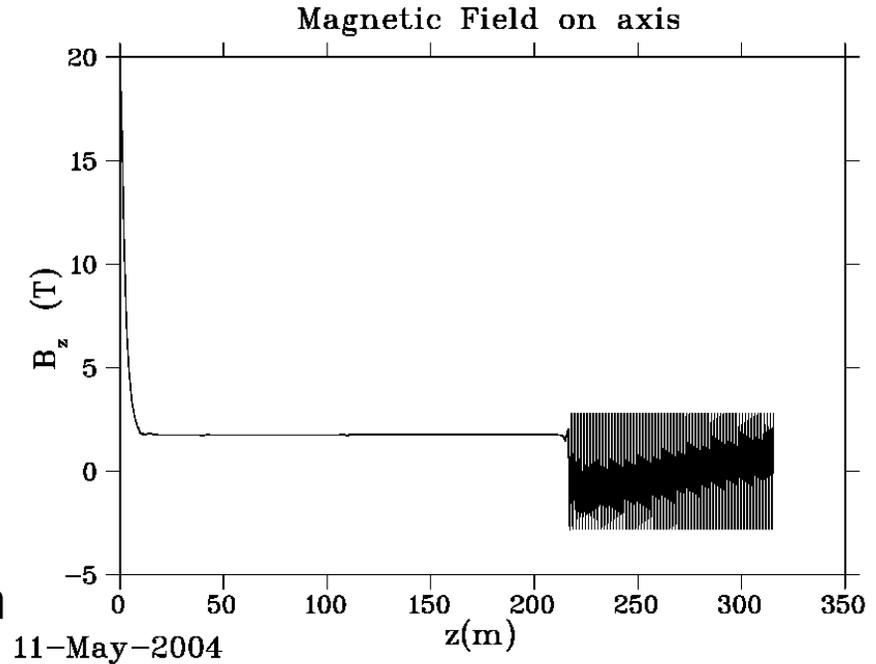



“Final” configuration


- Drift, buncher as before:
 - 300 → 230 MHz rf
 - 51 m, $V = 3 z/z_0 + 9(z/z_0)^2$
- “match” from 2 T to 2.75 T alternating solenoid at end of buncher
- Rotator lattice
 - 0.75 m cells, 0.5 m rf/cell
 - 133 A H₂, 3.4 MeV/cell
 - $V = 20$ MV/m, $\phi = 20^\circ$
 - 54 m
- Post Rotator Cooling lattice
 - $V = 16$ MV/m
 - 133 A H₂

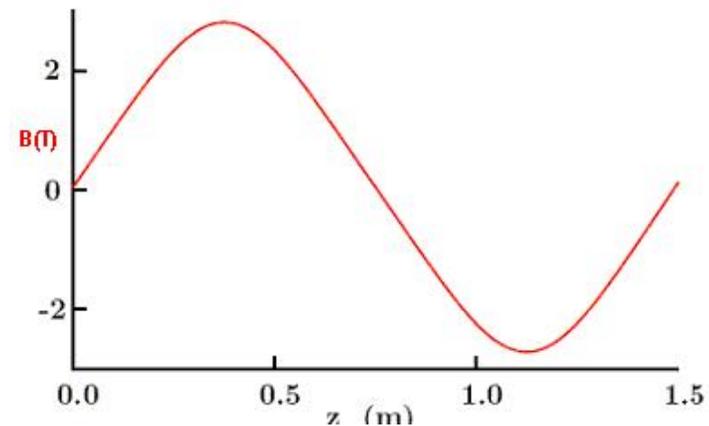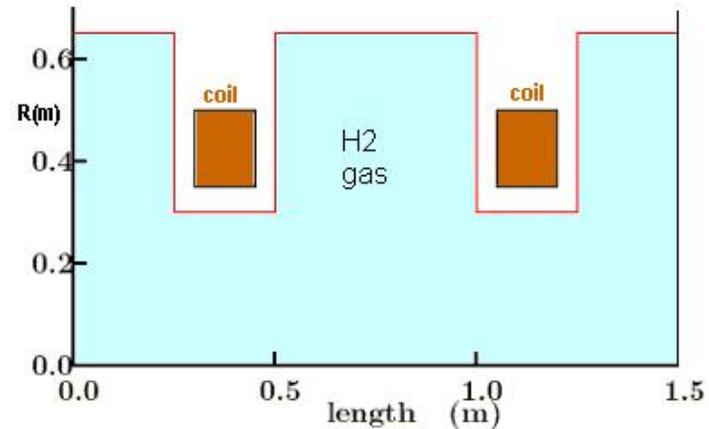




ICool results– gas cavities





- $\sim 0.20 \mu/p$ within reference acceptance at end of ϕ -E Rotator
- $\sim 0.10 \mu/p$ within restricted acceptance ($\epsilon_{\perp} < 0.015m$)
- Rms emittance cooled from $\epsilon_{\perp} = 0.019$ to $\epsilon_{\perp} = \sim 0.009$
- Longitudinal rms emittance $\cong 0.075$
- Continuing Study 2A cooling does not greatly improve acceptance

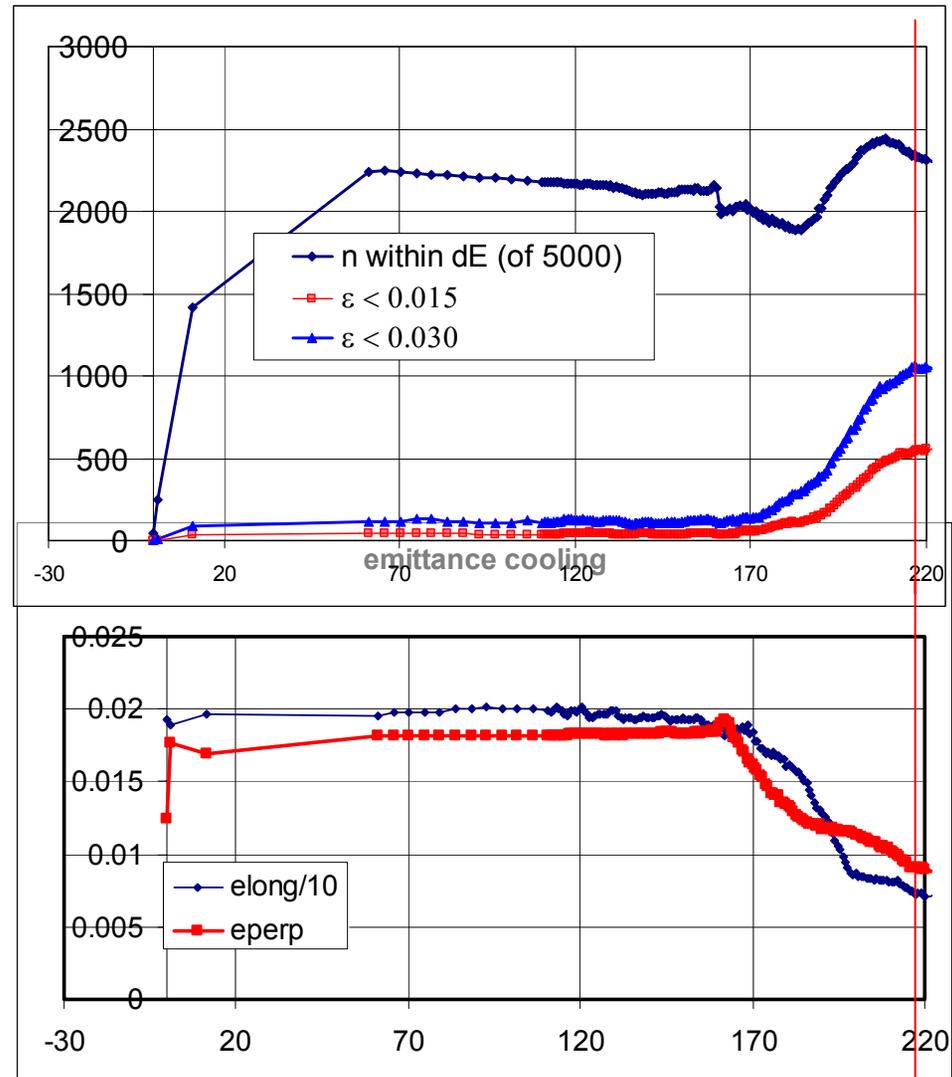


End of Rotator





Cooling simulation results

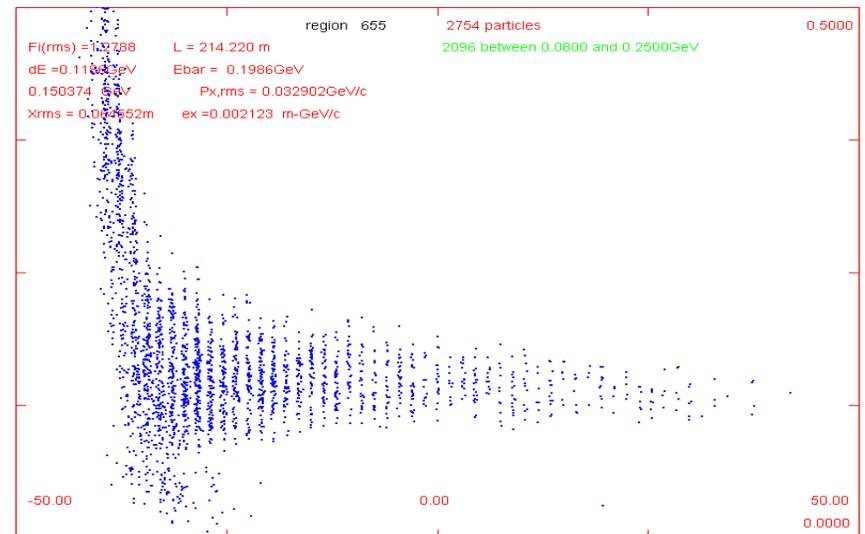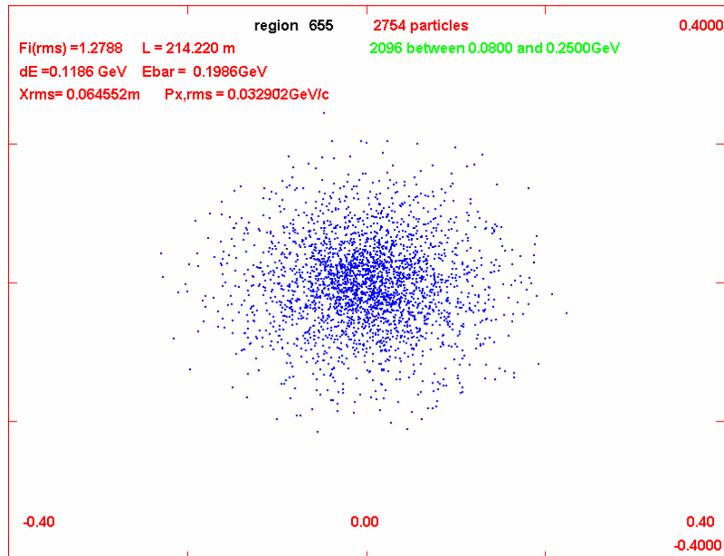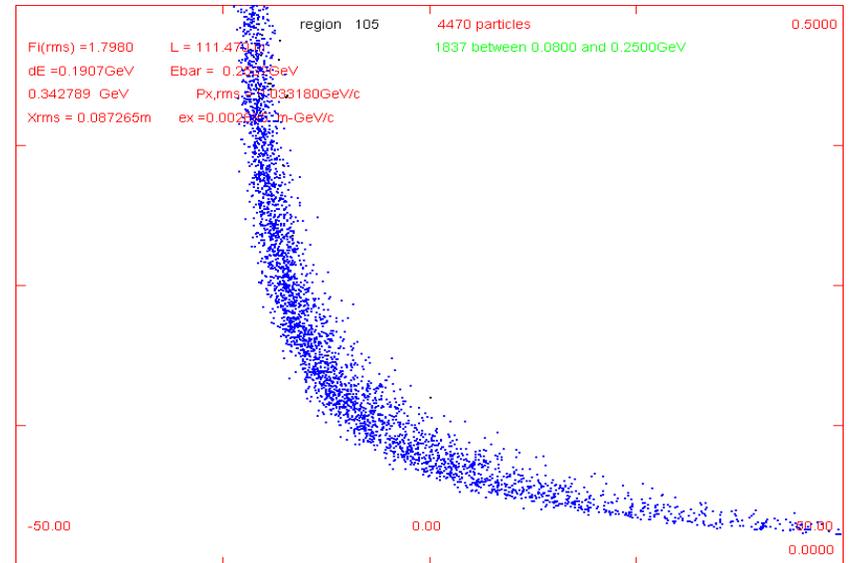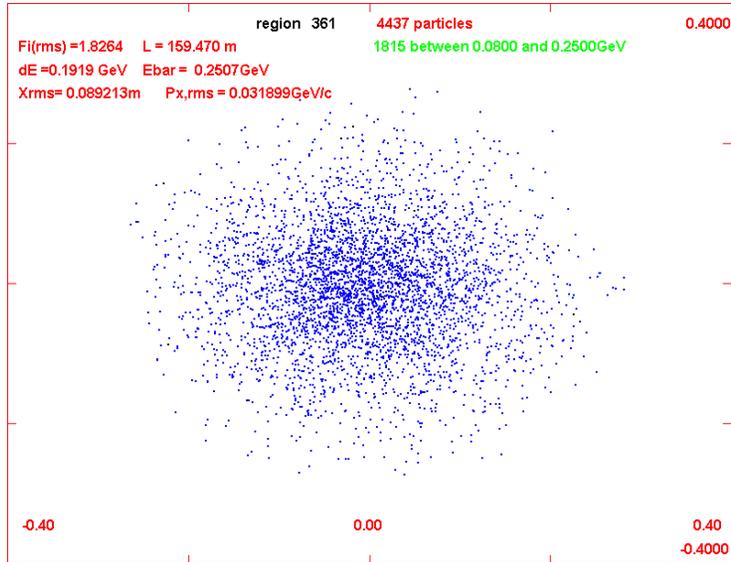




Modify initial solution


- Change pressure to 150Atm
- Rf voltage to **24 MV/m**
- Transverse rms emittance cools 0.019 to $\sim 0.008\text{m}$
- Acceptance $\sim 0.22\mu/\text{p}$ at $\epsilon_T < 0.03\text{m}$
- $\sim 0.12\mu/\text{p}$ at $\epsilon_T < 0.015\text{m}$
-

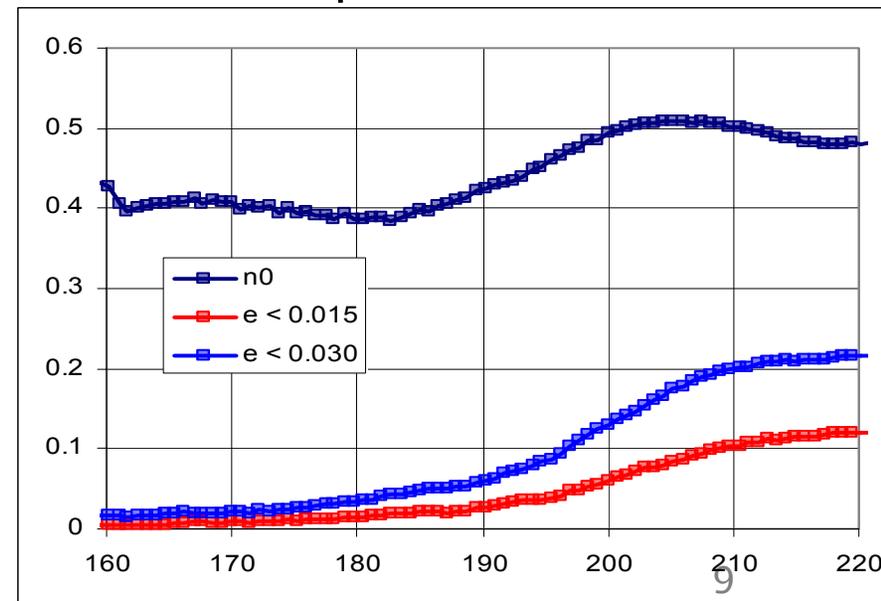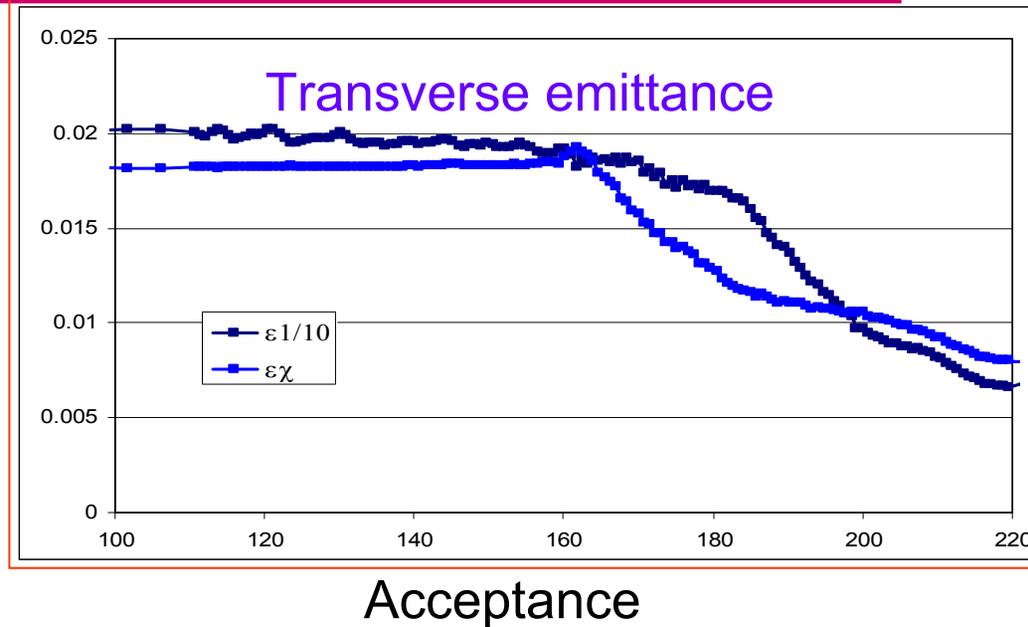



Same geometry – Be Windows


- Replace 150 A gas with 0.65cm thick Be windows on cavities
- Similar dynamics as H₂ but
- **Much worse** Study 2A performance (?)
- Transverse emittance cooling : 0.019 → 0.0115
- Muons within Study 2A acceptance:
 - 0.134 μ/p ($\epsilon_t < 0.03$)
 - 0.056 μ/p ($\epsilon_t < 0.015$)
- **Needs reoptimization?**
-

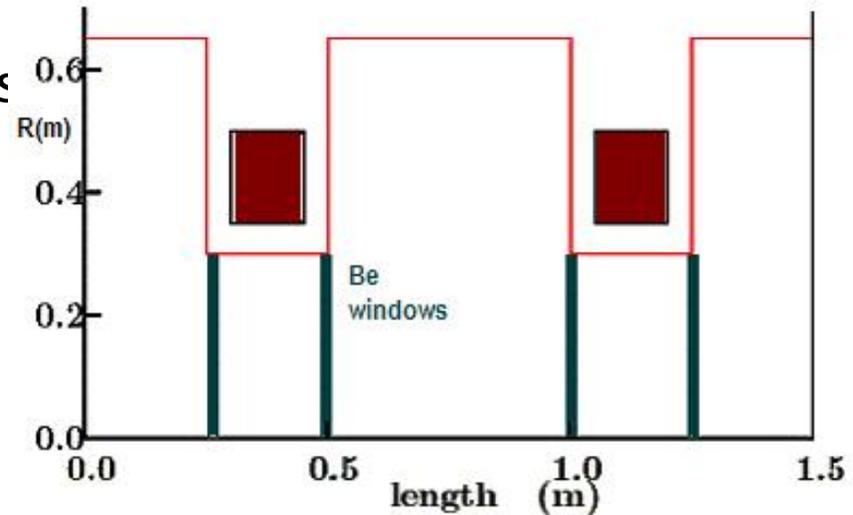



Try LiH Windows

- Replace 150 A gas with 1.2cm thick LiH windows on cavities
 - Similar dynamics as Be but
 - **Slightly better** than Be performance (?)
 - Transverse emittance cooling : $0.019 \rightarrow 0.0102$
 - Muons within Study 2A acceptance:
 - **$0.160 \mu/p$** ($\epsilon_t < 0.03$)
 - $0.075 \mu/p$ ($\epsilon_t < 0.015$)
- Needs reoptimization?

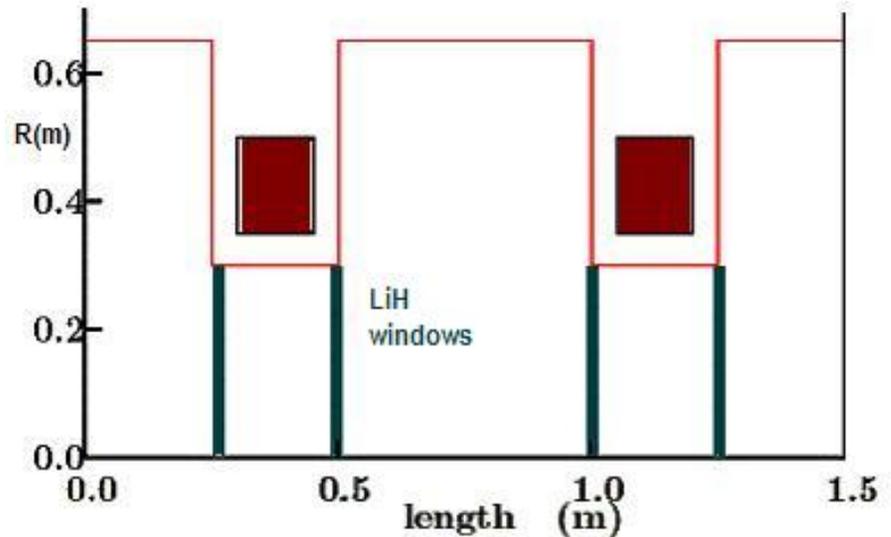



Cost estimates:


- Costs of a neutrino factory (MuCOOL-322, Palmer and Zisman):

Table 12: Study IIb Costs


Study 2

Study 2B

System	M\$	M\$	%	
Target, capture, 18 m drift	97.9	96.1	99	
Target	91.5	Target	89.7	
18 m Drift	5.8	18 m Drift	6.4	
Bunch and Phase Rotate	898.6	148.6	38	
Rotator	306.7	82 m Drift	19.3	
Mini-Cool	11.3	Buncher	44.8	
Buncher	75.6	Rotator	84.5	
cool	810.2		185.1	60
Acceleration	544.2	421.4	77	
Match	56.7	Match	23.1	
Pre-Acc	136.8	Pre-Acc	98.5	
RLA	350.9	RLA	99.6	
		FFAG 1	91.1	
		FFAG 2	109.1	
Ring	82.5		82.5	100
Total	1427		994	65

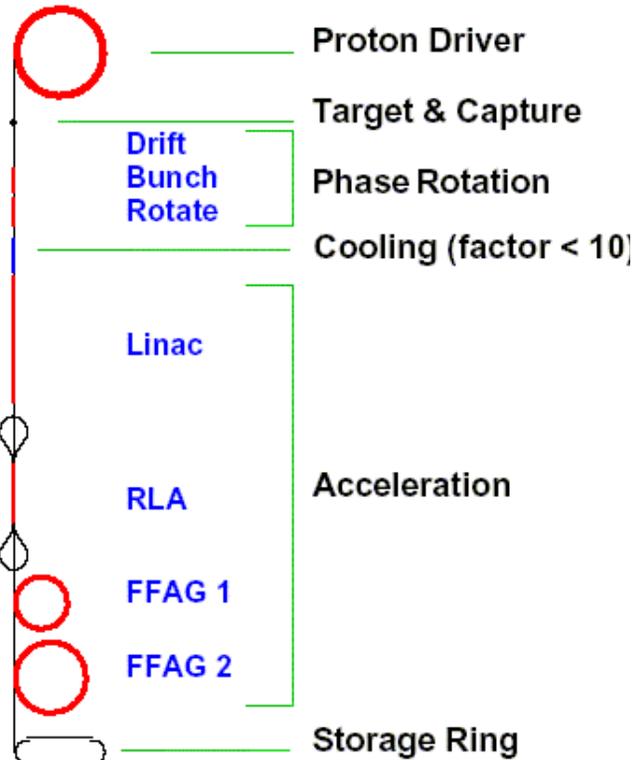

Combining cooling and phase rotation may reduce cost by ~ 100M\$




Component cost basis

M\$/GeV?

Table 5: Study IIb Buncher and Phase Rotation Costs

	M\$	Length	k\$/m	GeV	k\$/GeV	Scaling
Buncher	44.84	49.25		.12		
Conventional	5.71		116			length
Magnets + PS	20.16		115x3.59=409			length x $(BR^2)^{.577}$
Cryo	0.37		2.1x3.59=7.54			length x $(BR^2)^{.577}$
Vacuum	2.17		44			length
200 MHz RF 9 MV/m	4.29			.12	20x(16.1/9)=36	V/\mathcal{E}
200 MHz PS	8.05			.12	120x(9/16.1)=67	$V\mathcal{E}$
Diagnostics	4.09		83			length
Phase Rotation	84.52	56.25		0.469		
Conventional	3.69		65.6			length
Magnets + PS	23.00		115x3.59=409			length x $(BR^2)^{.577}$
Cryo	0.42		2.1x3.59=7.54			length x $(BR^2)^{.577}$
Vac	0.96		17			length
200 MHz RF 12.5 MV/m	12.1			.469	20x(16.1/12.5)=25.8	V/\mathcal{E}
200 MHz PS	43.70			.469	120x(12.5/16.1)=93.2	$V\mathcal{E}$
Diagnostics	0.65		11.5			length



Cost impact of Gas cavities

- Removes 80m cooling section (**-185 M\$**)
- Increase V_{rf}' from 12.5 to 20 or 24 MV/m
 - Power supply cost $\propto V'^2$ (?)
 - **44 M\$ \rightarrow 107M\$ or 155M\$**
- Magnets: 2T \rightarrow 2.5T Alternating Solenoids
 - **23 M\$ \rightarrow 26.2 M\$**
- Costs due to vacuum \rightarrow gas-filled cavities (??)
- Total change:
 - **Cost decreases by 110 M\$ to 62 M\$ (???)**




Summary

- High-frequency Buncher and ϕ - δE Rotator (v-Factory)
 - Variations (Poklonskiy may help),
 - Shorter systems ??
 - Other frequencies ?
- Gas-filled rf cavities
 - Higher gradient??
 - Optimize V'
 - Cool in buncher rotator

To do:

- Optimizations, Best Scenario, cost/performance ...



Motivation ...




www.dilbert.com scottadams@aol.com



12-5-05 © 2005 Scott Adams, Inc./Dist. by UFS, Inc.



© Scott Adams, Inc./Dist. by UFS, Inc.



Front end with high-pressure cavities

- See K. Paul
- More for μ -Collider
- Keep beam within 1 or fewer bunches
- Cavities start near target
 - (More radiation)
- Capture / phase rotate within a few meters
- Gas cavities enable cooling

