

AGS as a Proton Driver for a Neutrino Factory

W. T. Weng

Brookhaven National Laboratory

NuFact & Mu-Coll. Collaboration

UCLA, CA, Jan/29–Feb/1, 2007

Outline

- Evaluation of parameter dependence
- Possible design parameter phase space
- Improvements on the AGS, and its difficulties
- Summary and Conclusions

Considerations of parameters

we consider the effects of

1. Energy
2. Repetition Rate
3. Intensity
4. Bunch Length
5. Number of bunches

Of the Proton Driver

Proton per pulse required for 4 MW

$$\bar{P}_{\text{arc}}(\mathbf{w}) = \mathbf{E}[\mathbf{eV}] \times \mathbf{N} \times \mathbf{e} \times \mathbf{f}_{\text{rep}} [\mathbf{Hz}]$$


| | 10 Hz | 25 Hz | 50 Hz |
|--------|----------------------|----------------------|---------------------|
| 10 GeV | 250×10^{12} | 100×10^{12} | 50×10^{12} |
| 20 GeV | 125×10^{12} | 50×10^{12} | 25×10^{12} |

Process mesons through Cooling

Analysis II


Post Cooling

Count mesons within acceptance of 30π mm

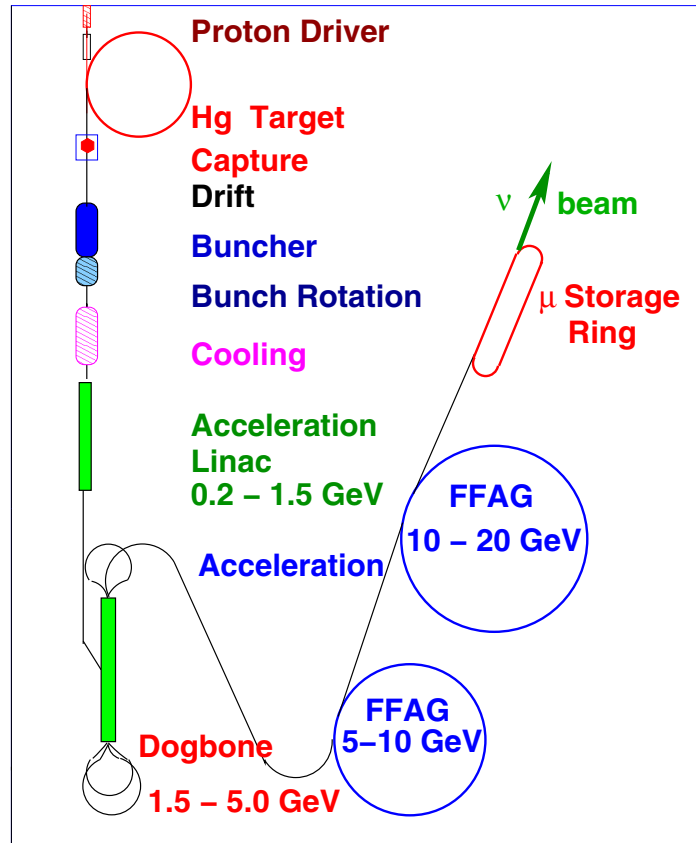

Post-cooling 30π Acceptance

MARS14

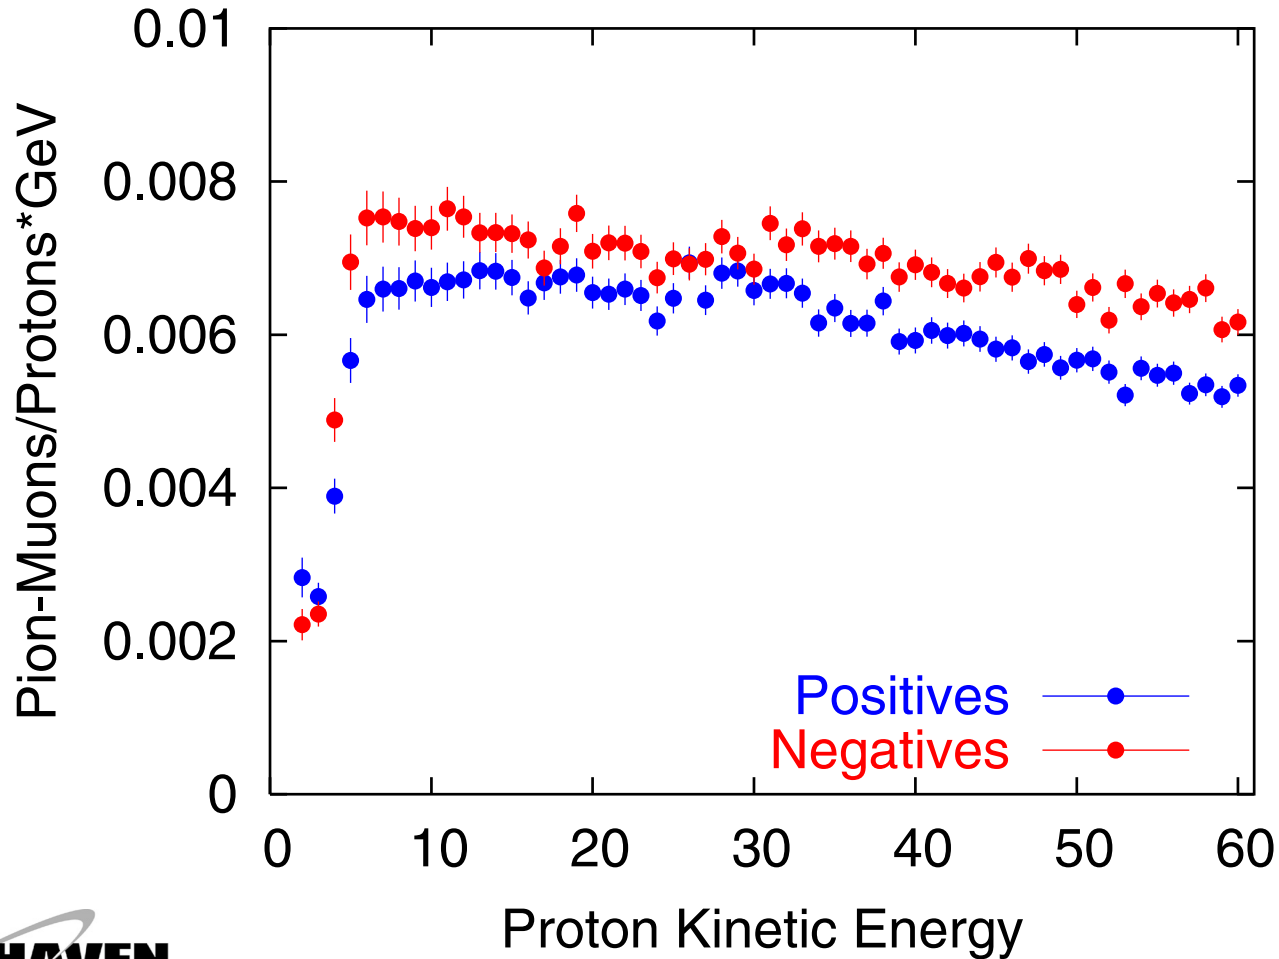


Preferred Beam Energy

- For Negatives the peak occurs for
 $6 \text{ GeV} < \text{Proton KE} < 11 \text{ GeV}$
- For Positives the peak occurs for
 $9 \text{ GeV} < \text{Proton KE} < 19 \text{ GeV}$
- **Consensus: 10 GeV is a good place to start**

Target/Beam Baseline used for

24 GeV Protons on Copper Target

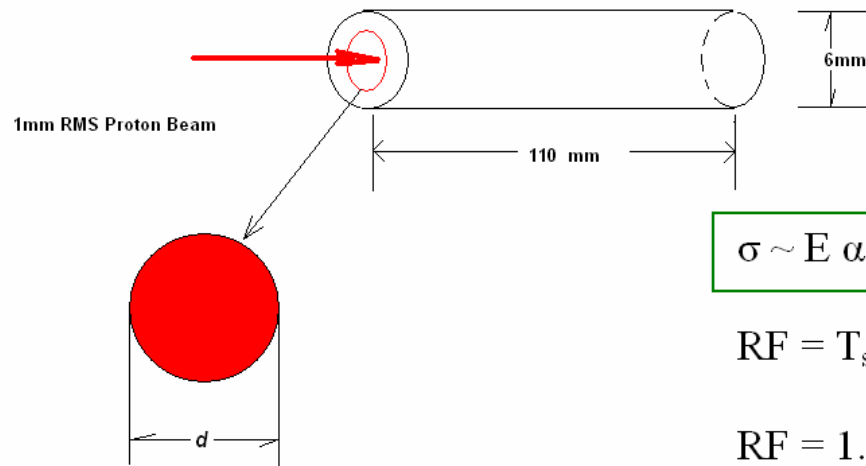

$$\sigma \sim E \alpha \Delta T / (1 - 2\nu) \cdot RF$$

$$RF = T_{\text{sound}} / T_{\text{pulse}} \quad (\text{if } T_{\text{sound}} < T_{\text{pulse}})$$

$$RF = 1.0 \quad (\text{if } T_{\text{sound}} > T_{\text{pulse}})$$

$$T_{\text{sound}} = d / V_s$$

V_s = sound velocity in material

heated target spot

Parameters Affecting Shock Level in Solid Target

- Heat capacity (controlling temperature spike)
- Speed of sound in the material
- pulse length
- coeff. of thermal expansion
- Young's modulus

NOTE: If pulse is too short NO reduction in peak stress can be realized since heated zone does not have time to relax during deposition


Summary of Target Performance

| | |
|---|--|
| <p>1 MW/50 Hz 12.0 e+12 ppp YES</p> | <p>4 MW/50 Hz 48.0 e+12 ppp NO</p> |
| <p>1 MW/200 Hz 3.0 e+12 ppp YES</p> | <p>4 MW/200 Hz 12.0 e+12 ppp MAYBE</p> |

Target/Capture/Decay

- Optimum target material - solid or liquid; low, medium or high Z
 - Targets examined: C, Cu, Hg, Ta, all with $r = 1$ cm
 - Proton beam energies considered: 5, 10 and 24 GeV
 - Proton bunches from 1–3 ns rms

- *Find 1 ns is preferred but 2–3 ns is acceptable;*
- *12% fall-off in performance at 3 ns;*
- *such short bunches hard to achieve at low energy*

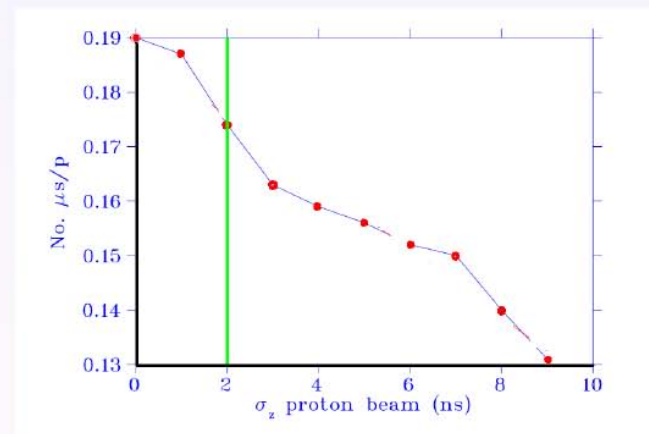


- Intensity limitations (from target or beam dump)
- Horn or solenoid capture



Design Parameter Phase Space

1. $8.0 \text{ GeV} < \text{Energy} < 20.0 \text{ GeV}$
2. Rep Rate $\sim 50(25) \text{ Hz}$
3. Intensity $50 * 10^{**}(12) \text{ ppp}$, at $10(20) \text{ GeV}$
(very difficulty with solid target)
4. Bunch Length $< 3 \text{ ns}$, for longitudinal
acceptance
5. Number of bunches $3 \sim 5$

2 MW AGS Proton Driver

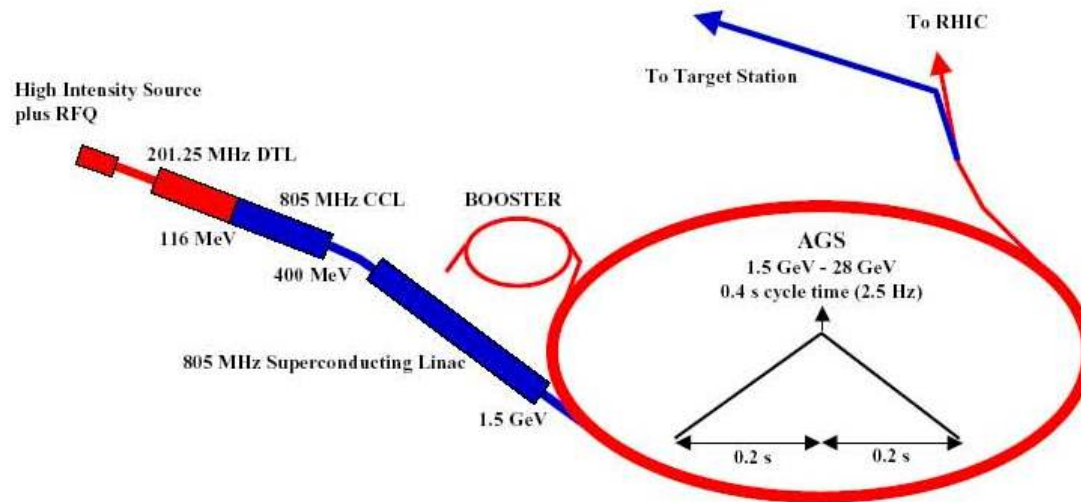

AGS proton driver layout for alternate injector linac design.

Methods of generating Short Bunch


- Short bunch can be generated by a compressing RF system
- It can also be generated by bunch rotation in the ring, or in the external beam line
(both of them need extreme high rf voltage)
- We try to do it by getting to the transition energy at extraction(low voltage is sufficient)

AGS parameters at Transition

Table 3.1: Main parameters of the AGS for the super neutrino facility.

| Parameter | | Unit |
|---|-----------------------|----------|
| Nominal transition energy, γ_T | 8.5 | |
| Acceleration rate, $\dot{\gamma}$ | 196.6 | s^{-1} |
| Magnet ramp rate, \dot{B} | 7.2 | T/s |
| rf voltage, V_{rf} | 1.0 | MV |
| rf harmonic number, h | 24 | |
| rf synchronous phase, ϕ_s | 0.52 | radian |
| Number of proton per bunch | 3.87×10^{12} | |
| Bunch area (95%) | 0.8 – 1.2 | eV·s |
| First-order non-linear compaction, α_1 | 2 | |
| Transition energy with γ_T -jump, γ_T | 9.5 | |
| Transition jump amount, $\Delta\gamma_T$ | ± 0.5 | |
| Transition jump time | < 1 | ms |
| Momentum aperture (without transition jump) | 2.4 | % |
| Momentum aperture (With transition jump) | 1.6 | % |
| Typical fractional beam loss | 0.2 - 3 | % |

Beam Parameters around Transition

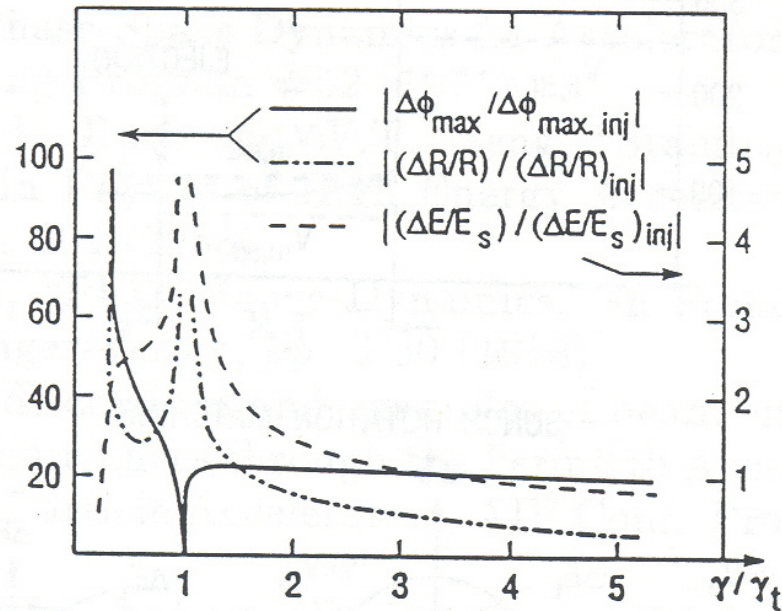

Typical variation of $\Delta\phi$, ΔR , and ΔE as the beam energy increases.

Longitudinal Space Charge Effect

sc parameter,




$$\eta_0 = \frac{3N}{2} \frac{r_p}{R} \frac{2\pi\hbar mc^2}{\gamma^2 eV \cos\phi_s} \frac{g_0}{\theta_0^3} \leq 3$$


scaling relation,

$$\eta_0 = \text{const} \times \frac{N}{R} \left(\frac{\hbar}{V} \right)^{5/4} \left(\frac{\zeta_i}{\gamma_i} \right)^{3/4}$$

(E. Courant, 1968)

Longitudinal phase space of the proton beam before, at, and after crossing the transition energy in the AGS obtained with the computer code TIBETAN.

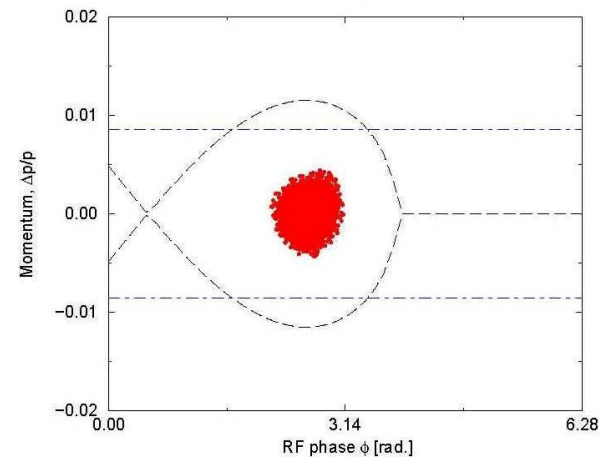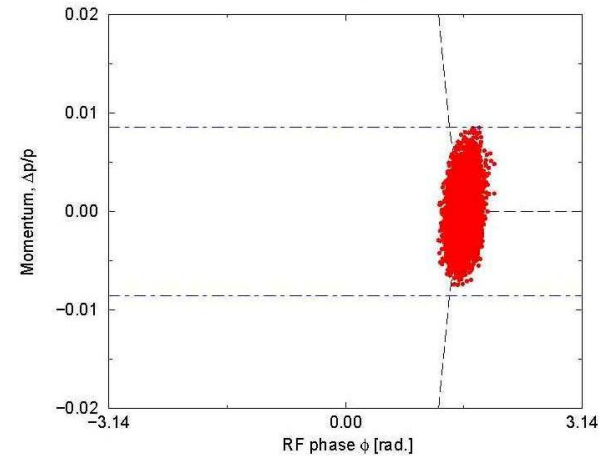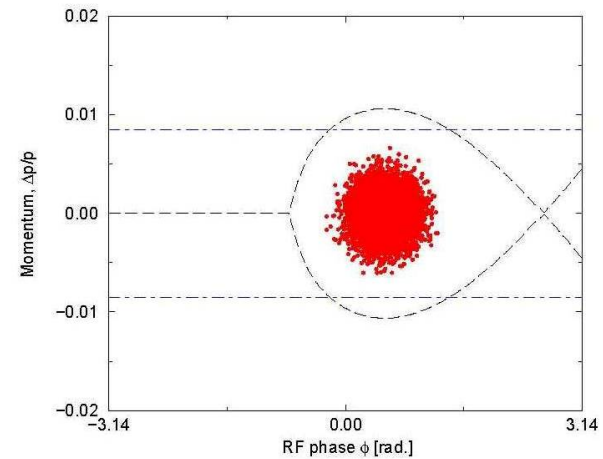

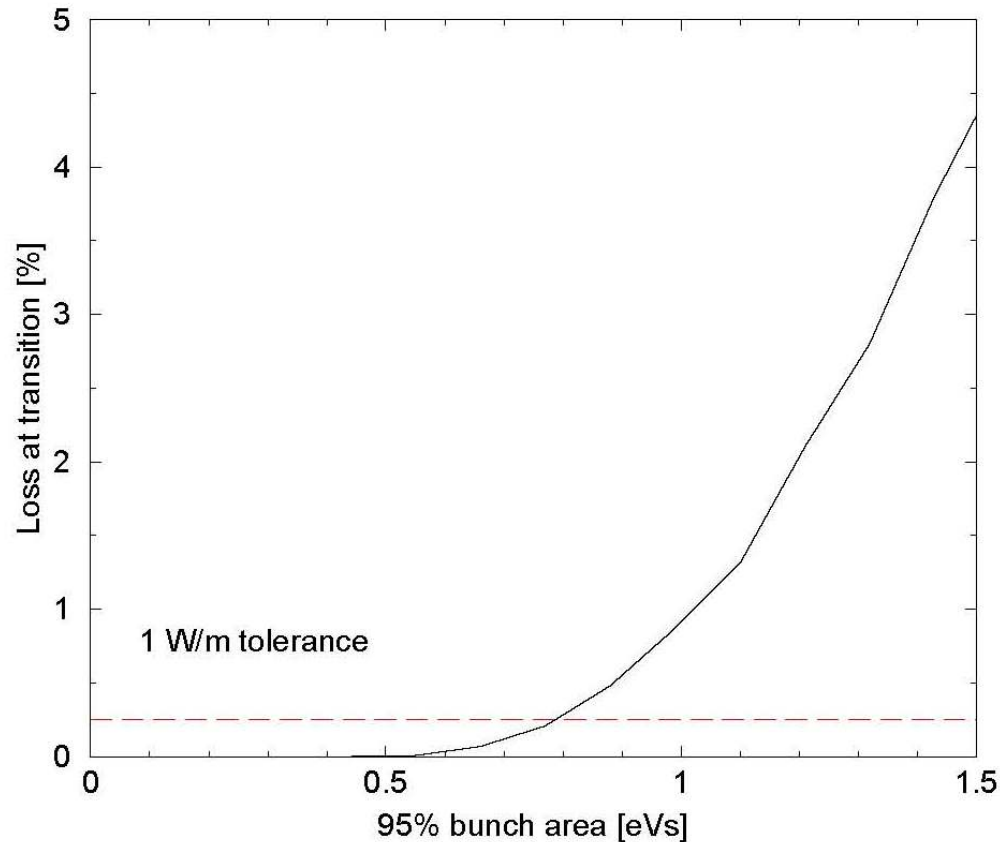

Expected fractional beam loss upon transition crossing as a function of the initial (95%) longitudinal beam area obtained with the computer code TIBETAN.

AGS as a Proton Driver

| | Present | Upgrade | |
|--------------------------------|----------------------|-----------------------|-----------------------|
| | | VLBL | NnFact |
| Average Beam Power | 0.14 | 2.0 | 4.0 |
| Beam Energy (GeV) | 24 | 28 | 10 |
| Number of Protons per Fill | 7.0×10^{13} | 9.0×10^{13} | 25.0×10^{13} |
| Number of Bunches per Fill | 12 | 23 | 23 |
| Protons per Bunch | 5.8×10^{12} | 3.91×10^{12} | 1.1×10^{13} |
| Repetition Rate (Hz) | 0.5 | 5.0 | 10.0 |
| Linac Energy (MeV) | 200 | 1500 | 1500 |
| Linac rms Emitt (p mm mr, nor) | 2.0 | 1.0 | 1.0 |
| Pulse Length (ms) | 0.5 | 0.72 | 0.72 |

Difficulties with this Scenario

- High current and single bunch intensity all exceed space charge limits
- Need rebunching for 3 ~ 5 bunches, unless allowing 6 batch extraction over 10 ~ 20 usec.
- Limitations of RF and PS systems
- Need better matching lattice at transition
- Possible beam losses and activation
- It seems 2 MW is the upper limit at the AGS

Decisions needed on Proton Driver

1. Performance requirements
2. Viability of existing driver proposals
3. Whether to focus on a new design
with an integrated design team
4. Cost to the total facility

Table of Proton Drivers

τ_p = pulse duration, N_b = number of bunches per pulse, τ_b = final compressed bunch length.

| Driver | Power (MW) | Type | Energy (GeV) | Frequency (Hz) | Protons per pulse ($\times 10^{13}$) | Pulse structure | | |
|-----------|------------|-------|--------------|----------------|--|---------------------|-------|---------------|
| | | | | | | τ_p (μ s) | N_b | τ_b (ns) |
| BNL-AGS | 1 | Synch | 28 | 2.5 | 9 | 720 | 24 | 3 |
| | 4 | Synch | 28 | 5 | 18 | 720 | 24 | 3 |
| | 4 | Synch | 40 | 5 | 12.5 | 720 | 24 | 3 |
| FNAL | 2 | Synch | 8 | 15 | 10 | 1.6 | 84 | 1 |
| | 2 | Linac | 8 | 10 | 15 | | | |
| FNAL MI | 2 | Synch | 120 | 0.67 | 15 | 10 | 530 | 2 |
| CERN-SPL | 4 | LAR | 2.2 | 50 | 23 | 3.2 | 140 | 1 |
| | 4 | LAR | 3.5 | 50 | 14 | 1.7 | 68 | 1 |
| J-PARC | 0.75 | Synch | 50 | 0.3 | 31 | 4.6 | 8 | 6 |
| RAL | 4 | Synch | 5 | 50 | 10 | 1.4 | 4 | 1 |
| | 4 | Synch | 6–8 | 50 | 8.3 | 1.6 | 6 | 1 |
| | 4 | FFAG | 10 | 50 | 5 | 2.3 | 5 | 1 |
| | 4 | Synch | 15 | 25 | 6.7 | 3.2 | 6 | 1 |
| | 4 | Synch | 30 | 8.33 | 10 | 3.2 | 8 | 1 |
| RAL/CERN | 4 | Synch | 30 | 8.33 | 10 | 3.2 | 8 | 1 |
| KEK/Kyoto | 1 | FFAG | 1 | 10^4 | 0.06 | 0.4 | 10 | 10 |
| | 1 | FFAG | 3 | $3 \cdot 10^3$ | 0.06 | 0.5 | 10 | 10 |



Summary and Conclusions

- Performance parameters of a PD for NuFact has been reviewed
- Ways to convert the AGS are described
- It is difficult to meet all requirements
- Site-independent new design has to be initiated, if other existing designs also can not meet the requirements.